


Izerwaren
Order
numbers

- Mortise lock backset 25 mm 1"
- Heavy duty
- Minimum door thickness 1 1/4"
- Minimum door style width: 1 5/8"
- Lock front plate case and parts 304 stainless steel
- Strike plate included
- Lock plate has square corners
- Both handed (latch-bolt reversible)
finish: Satin stainless steel or
Polished stainless steel

WELL SUITED FOR NARROW STYLE ALUMINUM DOORS WITH GLASS PANELS

19.82Z Entry Mortise Lock


Backset 25 mm
Center spindle to center key-hole: 78 mm (PC=78 mm)
Case: 40 mm x 180 mm x 17 mm thick
Front plate 250 x 22 mm
For 8x8 mm spindle / door lever
handles Material: 304 stainless steel
for lock case and lock plate. Bolts are
nickel plated brass; bronze springs.

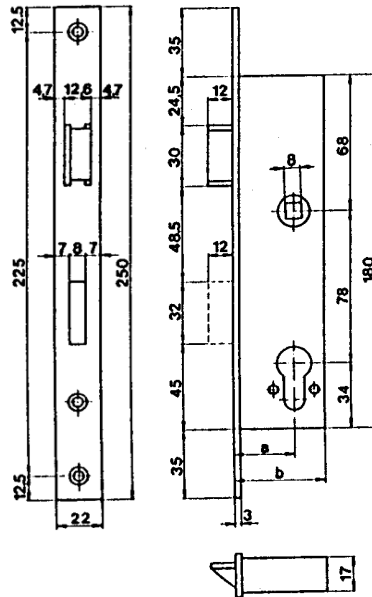

#19.82Z
Narrow backset mortise entry lock
lock case: 1 9/16 x 7 1/8" x 3/4" thick
lock plate: 7/8" x 9 7/8"
#12.021 Special cropped stainless steel lever handle
with oval roses #12.507
Profile cylinder #05.400 with over roses #12.517

19.83Z Entry Mortise Lock

Backset 50 mm
Center spindle to center key-hole: 78 mm (PC=78 mm)
Case: 65 mm x 180 mm x 17 mm thick
Front plate 250 x 22 mm
For 8x8 mm spindle / door lever
handles Material: 304 stainless steel
for lock case and lock plate. Bolts are
nickel plated brass springs are
bronze.

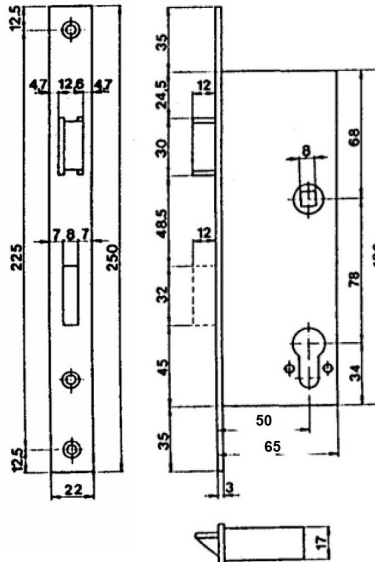

MATCHING SET DOOR HANDLES AND OVAL ROSES



12.507 **Oval Rose** for lever 66.5 x 29.5 mm




12.517 **Oval Rose** for Profile Cylinder
66.5 mm x 29.5 mm
Material: 304 stainless steel


12.045 **Door lever handle** 142x62 mm
Material: 304 stainless steel

Available with the following functions:

Passage, Privacy or Entry
Functions available through
Profile Cylinder set up
Contact our office
Sales@izerwaren.com



05.405 **Profile cylinder #1400 series**
Specify door thickness and function
cylinder.



#19.82Z 25 mm backset #19.83Z 50 mm backset

A=Backset 25 mm
A=Backset 50 mm

