



Firefighting Nozzles – Water and AFFF only



**#92.521 Nozzle with Ball Valve**  
Lever operated Blast/Closed/Misting.  
Operating pressure: up to 16 bar.  
Lightweight Nozzle. Aluminum with Polyamide grip. Nozzle opening: 12 mm diameter. Flow diameter: 30 mm  
Size: 380 mm long x 140 mm 15 x 5 1/2 inch. Weight off nozzle: 3 lbs. with aluminum Storz coupling N = 66 and conversion adapter. Used at European Mega Yachts  
Can be used with Storz Coupling N=66 and conversion adapter



**#91.KC1 Nozzle UL approved with Storz coupling N=66**  
Brass Chrome Plated Nozzle. UL Rated. Manufacturer Part Number: 6AKC1.  
Activates By: Twisting.  
For Use With Water.  
Inlet Size: 1 1/2 inch. Maximum Flow Rate: 130 gpm. Maximum Pressure: 100 psi.  
Nozzle Spray Pattern: Fog.  
Activation Method: Twist. Nozzle Type: Adjustable Gallonage.  
Rating: UNSPSC: 46191603.



**#91.151 Nozzle with Piston Grip Coast Guard Approved Firefighting Nozzle and UL rated.**  
With Storz N=66 coupling  
Dimensions Nozzle: 8 3/4" X High 10 3/4"  
Weight: 14.5 lbs.  
Add Storz Coupling weight: (2 lbs. brass chrome; 0.5 lbs. aluminum)  
Operating pressure: up to 100 PSI.  
Thread: US NPS female 1.75" -9  
To: US NPT 1 1/2" Storz coupling


Ajax Nozzle no 1 and Containers for 18 meter 1 1/2 diameter hose



**#91.718 Replacement Ajax nozzle #1 with Storz couplings N=66**  
Use with valve #91.778 and hose set #91.707



**#91.7071 Fire Hose Container Aluminum for use with 18 meter piroflex hoses with N=66 Storz couplings. Use with fire valve #91.778**

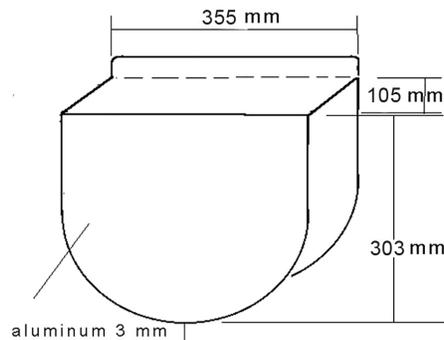

For use 18 meter hose with N=66 Storz couplings  
Part # 91.727



**Part#: 91.728 Fire Hose Container**  
600 x 500 x 180 mm, Fiberglass. Made from 1/8 inch Fiberglass for max. 18 meter fire hose; Equipped with stainless steel hinges and lockable stainless steel hasp



**Outside dimension: 457 x 558 x 187 mm (18" x 22" x 7 3/8").**



Hoses

|   |  |  |
|---|--|--|
|  <p><b>#91.707 Fire Hose Pyroflat white</b> 1 1/4 diameter with <b>Storz couplings N-52</b><br/>18 meter / 59 feet Pyroflat hose with aluminum Storz couplings distance = 52 mm.<br/><b>Use with valve #91.777</b></p> |  <p><b>#91.7071 Fire Hose piroflat white</b> 1 1/2 inch diameter with <b>Storz couplings N=66.</b><br/>18 meter / 59 feet w. alu. Storz coupling for 1 1/4 ID fire system Storz coupling distance = 66 mm.<br/><b>Use with fire valve #91.778</b></p> |  <p><b>#91.7072 Fire Hose white</b> 1 inch diameter with <b>clamping couplings</b><br/>18 meter / 59 feet w. alu. Storz coupling for 1 1/4 ID fire system Storz coupling distance = 66 mm.<br/><b>Use with fire valve #91.075</b></p> |
|---|--|--|

Adapters, Couplings

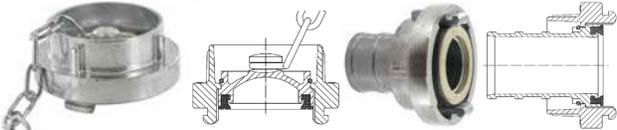
|  |  |
|--|--|
| <p><b>#92.380 Storz coupling male N=52</b><br/><b>#92.381 Storz coupling male N=66</b><br/>Please specify thread and base material (Brass or Aluminum)</p>   |   <p><b>#92.380/1</b> male thread</p>     |
| <p><b>#92.382 Storz coupling female N=52</b><br/><b>#92.383 Storz coupling female N=66</b><br/>Please specify thread and base material (Brass or Aluminum)</p>   |   <p><b>#92.382/3</b> female thread</p> |
| <p><b># 91.CSL female/female adapter from</b><br/>1 1/2" BSP to NPS 1 1/2"<br/>Chrome plated brass</p>   |  <p><b>#91.CSL</b></p>   |
| <p><b>#91.052 Dustcover Storz N-52</b> (Brass or Aluminum)<br/><b>#91.066 Dustcover Storz N-66</b> (Brass or Aluminum)<br/><b>#91.1431 Storz coupling w. hose barb N-52 to 1 1/2" hose</b><br/><b>#91.1436 Storz coupling w. hose barb N-66 to 1 1/2" hose</b></p> |    |



### Valves and Coupling




#91.778 Valve + 1 1/2" with N=66 Storz Coupling and Dust cap  
Steel powder coated turning wheel  
Thread: 1 1/2" BSP. Valve chrome over brass

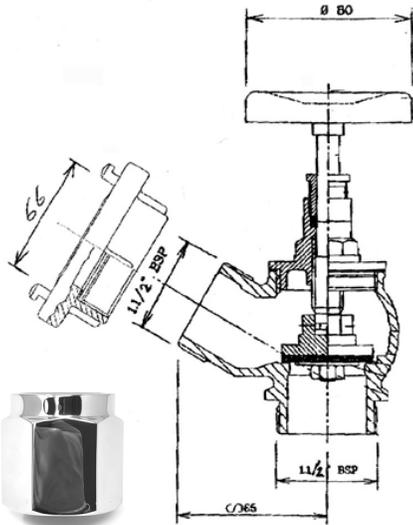


# 91.CSL female/female adapter 1 1/2" BSP to NPS



#91.777 Valve 1 1/4" showing with Storz coupling and dust cap N=52  
Steel powder coated turning wheel  
Thread: 1 1/4" BSP. Valve chrome plated brass

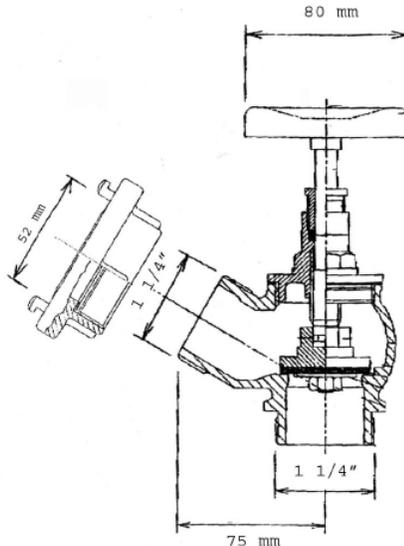

#91.075 Valve 1 inch showing with Stainless Steel Camlock Coupling & cap  
Steel powder coated turning wheel  
Thread: 1" BSP. Valve chrome plated brass

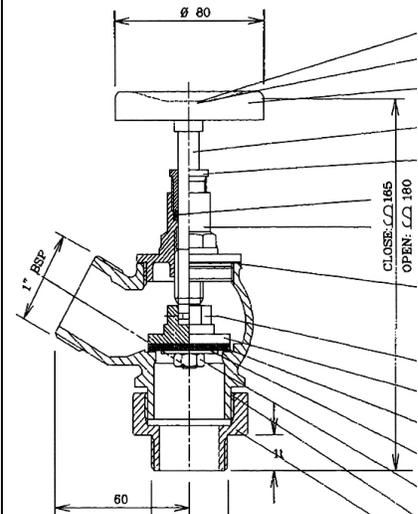


### Adapters, Couplings

#92.380 Storz coupling male N=52  
#92.381 Storz coupling male N=66  
Please specify thread and base material (Brass or Aluminum)



#92.380/1



male thread

#92.382 Storz coupling female N=52  
#92.383 Storz coupling female N=66  
Please specify thread and base material (Brass or Aluminum)



#92.382/3




female thread

# 91.CSL female/female adapter from 1 1/2" BSP to NPS 1 1/2"  
Chrome plated brass



#91.CSL

#91.052 Dustcover Storz N-52 (Brass or Aluminum)  
#91.066 Dustcover Storz N-66 (Brass or Aluminum)  
#91.1431 Storz coupling w. hose barb N-52 to 1 1/2" hose  
#91.1436 Storz coupling w. hose barb N-66 to 1 1/2" hose

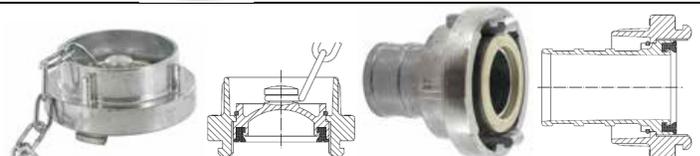



**Flange Mounted Valves, and Shore Flange with Storz Couplings, Nozzle and couplings**

|  |  |  |
|--|--|--|
| <p><b>#91.534</b><br/>International Shore Connection<br/>Brass flange with BSP 63 mm male thread.</p> <p>180 mm diameter x 12 mm flange<br/>(a Storz coupling 88 can be fitted.)<br/>Storz coupling not shown.</p>   |  | <p><b>#91.534</b></p> <p><b>International Shore Flange 63 mm BSP British Pipe Tread Male</b></p> |
| <p><b>#91.53173</b><br/>1 1/2 inch valve 60 degree on flange<br/>Flange: 150 mm diameter<br/>Size 1 1/2 inch:<br/>A = 88<br/>C = 150<br/>D = 175/195<br/>E = 66 Storz Coupling</p> <p>All Models:<br/>Black steel powdercoated wheel for safety.<br/><b>Order storz couplings separate</b></p>       | <p>60 degree model with DIN flange</p> <p><b>#91.53173</b></p>   | <p>1 1/2 inch valve 60 degree on flange<br/>order Storz coupling separate</p>                    |
| <p><b>91.150</b> Nozzle with horseshoe handle<br/>Dimensions:<br/>Long: 8 3/4" X High 10 3/4"<br/>Weight: 9 lbs<br/>Operating pressure: up to 100 PSI.<br/>Thread: US NPS female 1.75" -9<br/>Combination Fog and Straight Stream<br/>Constant gallonage for either pattern. Chrome Plated Brass</p> | <p><b>Coast Guard Approved<br/>Firefighting Nozzles –<br/>Water and AFFF only</b></p> <p><b>Coast Guard Approved<br/>AFFF/water Fog Nozzle with<br/>horseshoe handle</b></p> | <p><b>91.150</b><br/>Nozzle with horseshoe handle</p>  |
| <p><b>#92.380</b> Storz coupling male N=52<br/><b>#92.381</b> Storz coupling male N=66<br/>Please specify thread and base material (Brass or Aluminum)</p>   | <p><b>#92.380/1</b> male thread</p>  |  |
| <p><b>#92.382</b> Storz coupling female N=52<br/><b>#92.383</b> Storz coupling female N=66<br/>Please specify thread and base material (Brass or Aluminum)</p>   | <p><b>#92.382/3</b> female thread</p>  |  |
| <p><b>#91.052</b> Dustcover Storz N-52 (Brass or Aluminum)<br/><b>#91.066</b> Dustcover Storz N-66 (Brass or Aluminum)<br/><b>#91.1431</b> Storz coupling w. hose barb N-52 to 1 1/2" hose<br/><b>#91.1436</b> Storz coupling w. hose barb N-66 to 1 1/2" hose</p>                                   |  |  |